

PREMIER DX200 & DX200T Range - Centrifugal Fans

Key Features

Type:	Centrifugal extract.
Application:	Domestic bathrooms, shower rooms, toilets and utility rooms.
Control options:	Standard and timer.
Hole diameter:	117mm (wall/ ceiling)



Specifications

		DX200	DX200T
UK reference number:		91013AW	91014AW
Remote switch (not supplied):		X	X
Integral timer (adjustable from 30 sec - 20 mins):		-	X
Speeds:		2	4
Max. airflow (m³/h)	Speed 3:	-	108
	Speed 2:	108	79
	Speed 1:	50	50
	Trickle:	-	36
Max. airflow (l/s)	Speed 3:	-	30
	Speed 2:	30	22
	Speed 1:	14	14
	Trickle:	-	10
Sound pressure level (dB (A)@3m):		-	-
	Speed 3:	-	50
	Speed 2:	50	42
	Speed 1:	32	32
	Trickle:	-	26
Electrical power rating (W):		34	34
IP rating:		IP55	IP55
Weight (kg):		1.75	1.75
Ducting diameter:		100mm	100mm

XPELAIR DX200

Premier range of centrifugal fans are designed for domestic applications, where longer duct runs are required. All models have a gloss white casing with a clean and sleek appearance.

A two part casing means Premier fans can be recess or surface mounted. All models feature an automatic air operated back draught shutter.

The clip-off front cover and removable fan blade on all models allow easy cleaning and maintenance. All models also have a neon indicator.


DX 200 fans are IP55 rated. Are all suitable for 220V – 240V AC 50Hz mains operation. Motors are totally enclosed and maintenance free for life, with self-aligning bearings and a thermal cut out.

All electronics and wiring terminals are fully protected. The DX200T also has a mechanical trickle ventilation facility.


PREMIER DX200 & DX200T Range - Centrifugal Fans

Performance

DX 200 Range

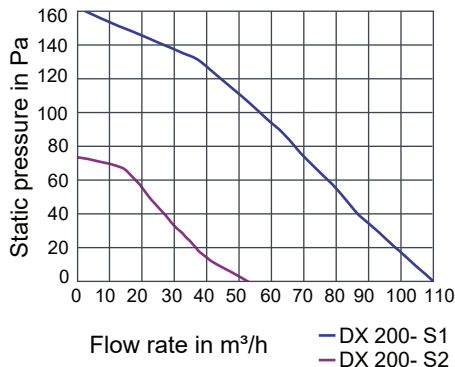

DX200T

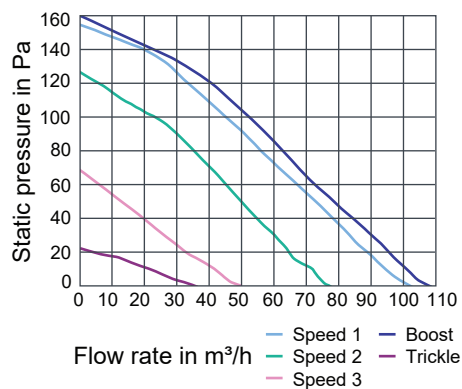

Models

DX200 Ref. 91013AW

- High performance centrifugal unit.
- 2 Speeds.
- Colour: white.
- Wall & ceiling mount.

DX200T Ref. 91014AW

- High performance centrifugal unit with timer.
- Built-in run-on period after light switched off.
- User adjustable from 30 sec - 20 mins.
- Colour: white.
- Wall & ceiling mount.

Controllers

Remote Humidistat XRH Ref. 21856AW

- Stand alone humidistat switches fan On/Off when RH reaches preset levels. Complete with pull cord override switch.


Time Delay Unit DT20 Ref. 21850AW

- User adjustable run-on timer (2-20 mins).


Passive Infrared Sensor XPIRA Ref. 21871AA

- Activates fan via body movement, ideal for infrequently used public spaces. Built-in timer to prevent nuisance tripping.

Dimensions (mm)

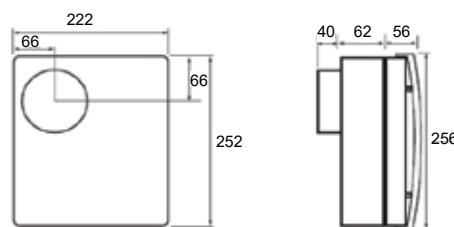


Installation and Accessories

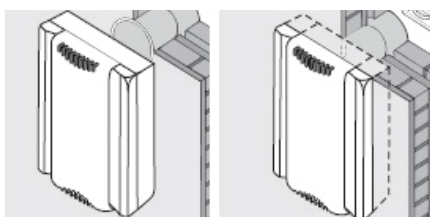

Wall mounting


Flush wall mounted

Hole diameter: 117mm
Ducting size: 100mm




Ceiling mounting with flat ducting

Hole diameter: 117mm [(W) 203mm x (H) 233mm (flush mounted)]
Ducting size: 100mm



Flush ceiling mounted



Surface ceiling mounted