

# SHOWER FAN Range - 100mm In-line Fan

## Key Features

Type: In-line single speed axial extract fan and system.

Application: Domestic toilets, bathrooms and shower rooms.



## XPELAIR Shower Fan

The Xpelair Shower Fan (BX100C) is designed to extract condensation laden air directly from above the shower, whilst bathing the cubicle in warm light.

The kits include everything needed for a standard installation including


a stylish ceiling inlet complete with bezel and 12V 50W sealed lamp, an in-line extract fan, 12V safety low voltage transformer, flexible ducting (100mm dia.) and a wall grille.

These fans are suitable for shorter duct runs (3m duct supplied) in shower cubicles, bathrooms and toilets.

All fans are IP55 rated and suitable for use with supply voltage of 220V-240V 50Hz.

The fan motor is sealed for life maintenance free and is fitted with safety thermal overload protection.

## Performance

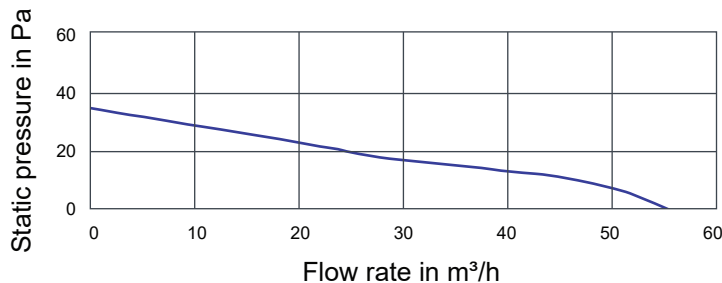

## Specifications

	BX100C
UK reference number:	92278AW
Colour:	Chrome Bezel
Remote switch (not supplied):	X
Duct length (supplied) (mm):	3m
Max extract performance (m³/h):	56
Sound pressure level (dB (A)@3m):	36
Electrial power rating (W):	15
Weight (kg):	0.5