

PREMIER DX200 & DX200T Range - Centrifugal Fans

Key Features

Type:	Centrifugal extract.
Application:	Domestic bathrooms, shower rooms, toilets & utility rooms.
Control options:	Standard & timer.
Hole diameter:	117mm (Wall/ceiling)



XPELAIR DX200

Premier range of centrifugal fans are designed for domestic applications, where longer duct runs are required. All models have a gloss white casing with a clean and sleek appearance.

A two part casing means Premier fans can be recess or surface mounted. All models feature an automatic air operated back draught shutter.

The clip-off front cover and removable fan blade on all models allow easy cleaning and maintenance. All models also have a neon indicator.

DX 200 fans are IP55 rated. Are all suitable for 220V – 240V AC 50Hz mains operation. Motors are totally enclosed and maintenance free for life, with self-aligning bearings and a thermal cut out.

All electronics and wiring terminals are fully protected. The DX200T also has a mechanical trickle ventilation facility.


Specifications

	DX200	DX200T
UK reference number:	91013AW	91014AW
Remote switch (not supplied):	X	X
Integral timer (adjustable from 30 sec - 20 mins):	-	X
Speeds:	2	4
Max. airflow (m ³ /h)	Speed 3:	108
	Speed 2:	79
	Speed 1:	50
	Trickle:	36
Max. airflow (l/s)	Speed 3:	30
	Speed 2:	22
	Speed 1:	14
	Trickle:	10
Sound pressure level (dB (A)@3m):	Speed 3:	50
	Speed 2:	42
	Speed 1:	32
	Trickle:	26
Electrical power rating (W):	34	34
IP rating:	IP55	IP55
Weight (kg):	1.75	1.75
Ducting diameter:	100mm	100mm


PREMIER DX200 & DX200T Range - Centrifugal Fans

Performance

DX 200 Range

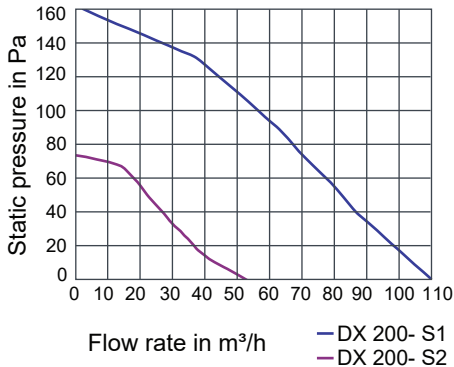

DX200T

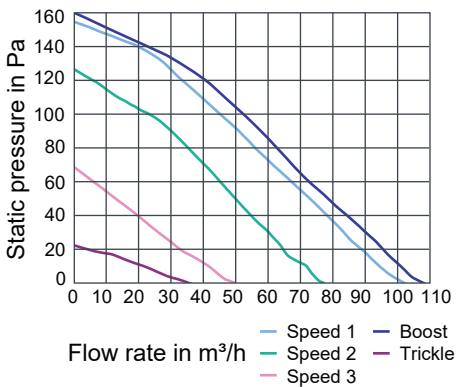

Models

DX200 Ref. 91013AW

- High performance centrifugal unit.
- 2 Speeds.
- Colour: white.
- Wall & ceiling mount.

DX200T Ref. 91014AW

- High performance centrifugal unit with timer.
- Built-in run-on period after light switched off.
- User adjustable from 30 sec - 20 mins.
- Colour: white.
- Wall & ceiling mount.

Controllers

Remote Humidistat XRH Ref. 21856AW

- Stand alone humidistat switches fan On/Off when RH reaches preset levels. Complete with pull cord override switch.


Time Delay Unit DT20 Ref. 21850AW

- User adjustable run-on timer (2-20 mins).


Passive Infrared Sensor XPIRA Ref. 21871AA

- Activates fan via body movement, ideal for infrequently used public spaces. Built-in timer to prevent nuisance tripping.

Dimensions (mm)

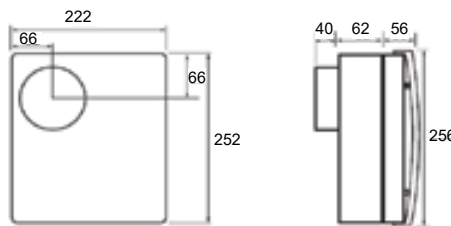


Installation and Accessories

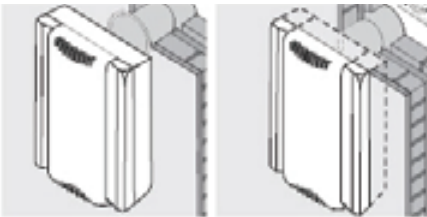

Wall mounting

Flush wall mounted

Hole diameter: 117mm
Ducting size: 100mm

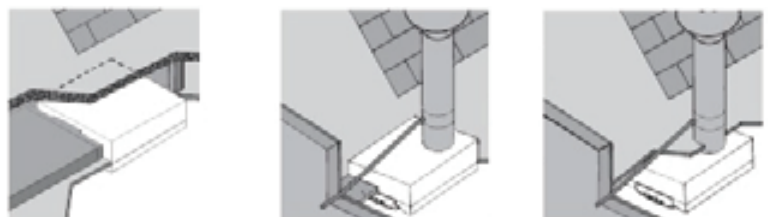

Ceiling mounting with flat ducting

Flush ceiling mounted

Surface ceiling mounted

Hole diameter: 117mm [(W) 203mm x (H) 233mm (flush mounted)]
Ducting size: 100mm